

US300 Stainless Steel Pressure Transducer



- OEM and End User
- High Accuracy
- Compact Package
- Wide Temperature Range

DESCRIPTION

The low cost US300 Series incorporates stainless steel isolation, and provides a wide choice of standard pressure ranges and electrical outputs in a very compact package. This product uses MEAS' UltraStable™ technology that provides stability over a wide temperature range, performance previously available only in much higher priced sensors. The modular design is adaptable to a wide variety of pressure ports and electrical connectors. Standard outputs include 0 to 100mV, 0.5 to 4.5V ratiometric, 1 to 5V regulated and 4 to 20mA current loop.

FEATURES

- 0.1% Accuracy
- -40°C to +105°C Operating Temperature Range
- 100% Stainless Steel 316L Isolation
- Wide Variety of Pressure Ranges and Electrical Outputs
- Low Cost and Compact Package
- UltraStable™ Technology

APPLICATIONS

- Refrigeration and HVAC Controls
- Compressed Gases
- Process Control
- Water Pressure Monitoring

STANDARD RANGES

Range	psig	psia	Range	Barg	Bara
0 to 15	•	•	0 to 1	•	•
0 to 30	•	•	0 to 2	•	•
0 to 50	•	•	0 to 5	•	•
0 to 100	•	•	0 to 7	•	•
0 to 300	•	•	0 to 10	•	•
0 to 500	•	•	0 to 20	•	•
0 to 1k	•	•	0 to 35	•	•
0 to 3k	•	•	0 to 70	•	•
0 to 5k	•	•	0 to 100	•	•
			0 to 200	•	•
			0 to 350	•	•

US300 Stainless Steel Pressure Transducer

PERFORMANCE SPECIFICATIONS

Ambient Temperature: 25°C (unless otherwise specified)

PARAMETERS	MIN	TYP	MAX	UNITS	NOTES
Offset	-1	±0.5	1	%Span	1
Span	-1	±0.5	1	%Span	1,2
Accuracy (combined non linearity, hysteresis, and repeatability)	-0.15	±0.1	0.15	%Span	2,3
Output Resistance (0 -100mV)	4	12	30	kΩ	1
Temperature Error – Offset	-1.5	±0.75	1.5	%Span	4
Temperature Error – Span	-1.5	±0.75	1.5	%Span	4
Supply Current (0 – 100mV)		1	2	mA	
Supply Current (0.5 – 4.5V, 1 – 5V)	2.5	3	5	mA	
Long Term Stability (1 year)	-0.1		0.1	%Span	
Frequency Response (-3dB)			1	kHz	
Compensated Temperature	-20		+85	°C	
Operating Temperature	-40		+105	°C	
Storage Temperature	-40		+125	°C	
Proof Pressure	3X			Rated	
Burst Pressure	4X			Rated	
Vibration	±20			g	5
Shock (11ms)	100			g	6
Pressure Cycles (Zero to Full Scale)	1			Million	
Isolation Resistance (50Vdc)	50			MΩ	
Weight				grams	
Media Compatibility	All Materials Compatible with 316 Stainless Steel				
Environmental Protection	IP 67 (Cable Version)				

For custom configurations, consult factory.

Notes

1. Output loading may affect performance.
2. For low level (100mV) sensors span is ratiometric to supply (10mV/volt output).
3. Best fit straight line.
4. For pressures > 1k psi, 0.25% Best fit straight line.
5. Per MIL-STD-810C, Procedure 514.2, Figure 514.2-2, Curve L.
6. 1/2 sine per MIL-STD 202F Method 213B condition A.

US300 Stainless Steel Pressure Transducer

DIMENSIONS

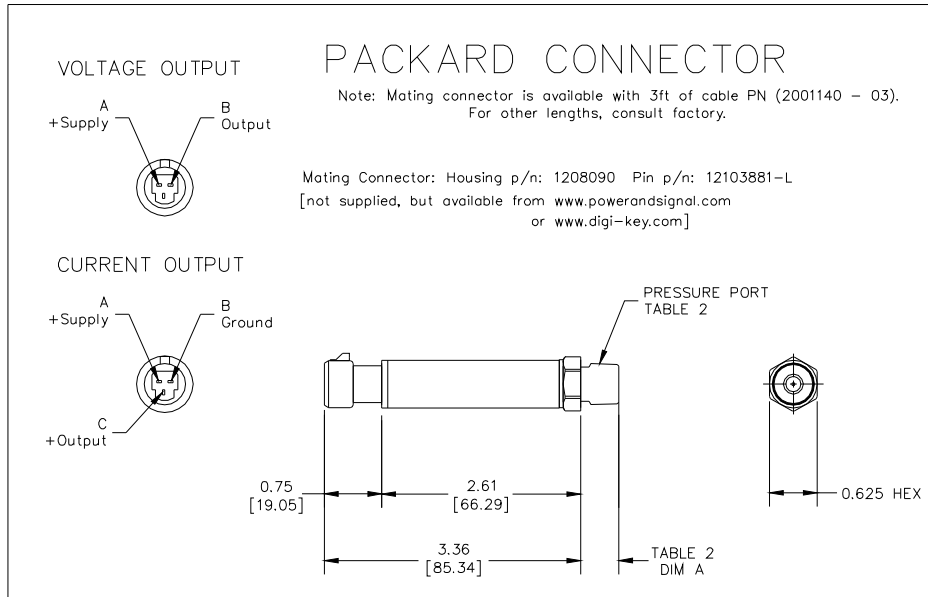
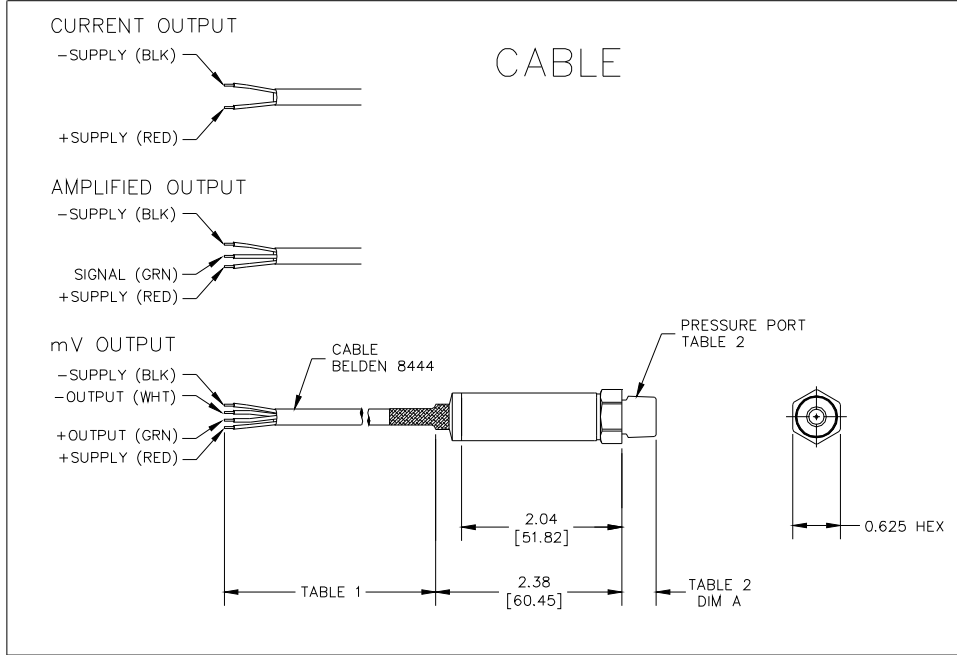


TABLE 1

TABLE 2

CONNECTION		PRESSURE PORT		
CODE	CONNECTOR	CODE	PORT	DIM A
1	CABLE 2 FOOT	2	1/4 BSP	0.45 [11.43]
2	CABLE 4 FOOT	4	7/16-20 MALE O-RING	0.33 [8.38]
3	CABLE 10 FOOT	5	1/4 NPT	0.50 [12.7]
4	PACKARD CONNECTOR	6	1/8 NPT	0.475 [12.07]

US300 Stainless Steel Pressure Transducer

OUTPUT OPTIONS

Code	Output	Supply (V)		
		MIN	TYP	MAX
2	0 – 100 mV (ratiometric)	2.5	5	12
3	0.5 – 4.5 V (ratiometric)	4.75	5	5.25
4	1 – 5 V	8		30
8	4 – 20 mA	9		30


Packard connector not available with mV output.

Wiring Code

Code	Output	+Supply	-Supply	+Out	-Out
2	0 – 100 mV (ratiometric)	Red	Black	Green	White
3	0.5 – 4.5 V (ratiometric)	Red/Pin A	Black/Pin B	Green/Pin C	N/A
4	1 – 5 V	Red/Pin A	Black/ Pin B	Green/Pin C	N/A
8	4 – 20 mA	Red/Pin A	Black/Pin B	N/A	N/A

ORDERING INFORMATION

US381-000005-500PG

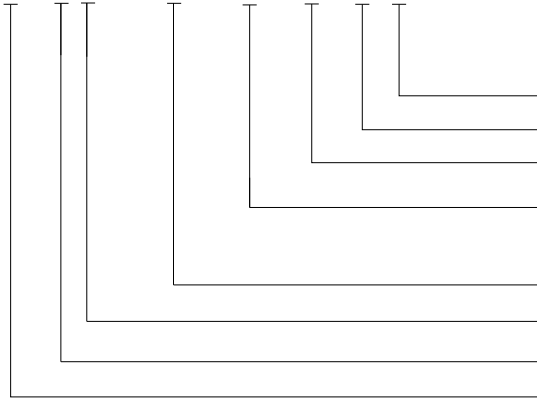

Type (A = Absolute, G = Gage)

Units (P = psi, B = Bar)

Pressure Range (500 = 500, 05K = 5000)

Pressure Port (2 = 1/4-19BSP, 4 = 7/16-20UNF, 5 = 1/4-18NPT, 6 = 1/8-27NPT)

Options (nnnnn = Custom Drawing)

Connection (1 = 2ft, 2 = 4ft, 3 = 10ft Cable, 4 = Packard)

Output (2 = 0 - 100mV, 3 = 0.5 - 4.5V, 4 - 1 - 5V, 8 = 4 - 20mA)

Model

NORTH AMERICA

Measurement Specialties
45738 Northport Loop West
Fremont, CA 94538
Tel: 1-800-767-1888
Fax: 1-510-498-1578
Sales: pfg.cs.amer@meas-spec.com

EUROPE

Measurement Specialties
(Europe), Ltd.
26 Rue des Dames
78340 Les Clayes-sous-Bois, France
Tel: +33 (0) 130 79 33 00
Fax: +33 (0) 134 81 03 59
Sales: pfg.cs.emea@meas-spec.com

ASIA

Measurement Specialties
(China), Ltd.
No. 26 Langshan Road
Shenzhen High-Tech Park (North)
Nanshan District, Shenzhen 518107
China
Tel: +86 755 3330 5088
Fax: +86 755 3330 5099
Sales: pfg.cs.asia@meas-spec.com

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.